



6 K H H U : H D Y H , &

' H Q V H % D V N H W : H D Y H

Fire Rated

Available Colours

) D E U L F 6 S H F L ; F D W L R Q V

White P02


White/Bone P04

White/Platinum P05

Charcoal V21

Charcoal/Grey V22

Charcoal/Chestnut V24

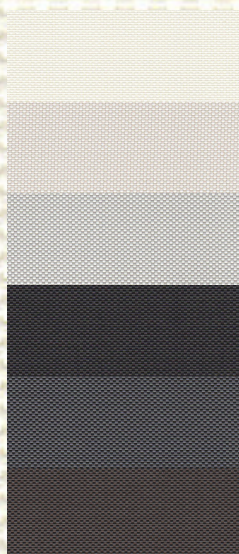

Stock Widths 98"

Openness Factor 3%

Composition 38% Fiberglass
62% Vinyl on Fiberglass

Thickness .025"

Weight 16.4 oz/sq yrd

Fire Rating NFPA 701-2004/CA US Title 19

Cleaning Instructions Contact Manufacturer

Spline Yes

Railroaded Not Recommended

6 K H H U : H D Y H , & W K O I D W H Q V W Q R Y D W X L O F R I Q W I D E O G L F Y H O R S P H W O V O K E I H Q H ; W V F H U W L ; F D W L R Q V K Q V L S F D O L ; F D W L R Q V H R P W R I [S H F W R B K H H U : H D Y H W Q L T X H O \ designed for the demanding and competitive commercial market, SheerWeave BASIC is an ideal F K R L I F F H R X V S H F G U S V R I O H S F R V U H R E X ; V W U J O F R U M D U Q L Y H 6 K H H U : H D Y H , & W K B I G G H G U D E K O L W U D D ; U F H D Q S X E O L S F D F H M T X L X H L W D I R O H O S H R V L Q W H U L R U window shade applications, SheerWeave BASIC is an economical alternative to traditional solar screen fabrics. SheerWeave BASIC fabrics are also suitable for exterior roller shades.

‡ ASTM E2180, ASTM 22 AATCC30 Part 3, ASTM G21, ASTM D3273, GREENGUARD Mold & Bacteria Standard ASTM 6329

‡ If you require additional fabric send E-mail to: samples@frasershading.com

‡ Actual fabric colours may vary from pictures, Fabric stock levels may vary.

‡ 2 S H Q Q H D F W D U V S S U R [L P D R F H X D V H H F R P H Q G H G

‡ Specifications V X E M H A F W without notice. ©Fraser Shading Systems 2014



SheerWeave Basic 3% Fenestration Properties

Description	Colour	T _s	R _s	A _s	T _v	S/C (Internal)		
						1/8" C/L	1/4" C/L	1/4" H.A.
White	White	15	64	21	16	0.32	0.33	0.32
White	Bone	12	58	30	11	0.37	0.37	0.34
White	Platinum	8	50	42	8	0.41	0.41	0.36
Charcoal	Charcoal	1	4	95	2	0.73	0.69	0.50
Charcoal	Grey	1	8	91	2	0.70	0.66	0.49
Charcoal	Chestnut	1	5	94	1	0.71	0.67	0.50

KEY: T_s = Solar Transmittance, R_s = Solar Reflectance, A_s = Solar Absorption, T_v = Visible Transmittance

The solar optical properties are used to calculate the shading coefficient. The shading coefficient represents the percentage of solar heat gain that is transmitted to the interior through the glass and the shading system.

Darker colours provide maximum glare reduction and visibility. For complete technical information, current test results, performance specifications and larger samples, contact FSS

Specifications:

Composition: 38% Fiberglass, 62% Vinyl on Fiberglass

Openness factor: Approximately 3%

Weight: 16.4 oz/yd² (556 g/m²)

Thickness: .025 in (0.64mm)

Acoustical Value: NRC .60 / SAA .60

Accoustical Performance: NRC (Noise Reduction Coefficient) and SAA (Sound Absorption Average) tested in accordance with ASTM C423-09a.